

Tabela de produtos ofertados

Lote	Especificação TR	Marca	Modelo	QTD Estimada	Valor Unit	Valor Total
1	MICROCOMPUTADOR AVANÇADO COM MONITOR - 32GB DDR4 RAM SSD 1T - PLACA DE VÍDEO 12GB DDR6	LENOVO	P3+T22I	2381	R\$ 25.000,00	R\$ 59.525.000,00
3	NOTEBOOK AVANÇADO 15,6" - 32GB DDR5 - SSD 1TB - PLACA DE VÍDEO 8GB DDR6	LENOVO	P16V	103	R\$ 20.000,00	R\$ 2.060.000,00

Valor total da proposta inicial de R\$ 61.585.000,00 (sessenta e um milhões, quinhentos e oitenta e cinco mil reais)

Item 1

Fabricante: **Lenovo**

Modelo: **ThinkStation P3**

Processador: Intel® Core™ i7-13700K

Memoria: 16 GB DDR5-4400MHz (UDIMM, ECC) QTY(2)

Disco: 1 TB SSD M.2 2280 PCIe Gen4 Performance TLC Opal

Placa de video: NVIDIA RTX™ A2000 12GB GDDR6

Fonte: Mínimo de 700W e eficiência de 90%

Sistema Operacional: Windows 11 Pro;

Software de Segurança ABSOLUTE versão Resilience

Monitor mínimo de 21" – Modelo **ThinkVision T22i-30**

Travas para Desktops e Monitor conforme solicitado em edital;

Garantia de 36 meses para o equipamento e monitor com tempo de solução de até 48h úteis;

Item 3

Fabricante: **Lenovo**

Modelo: **ThinkPad P16v Gen 2**

Processador: Ultra 7 Processor 165H vPro;

Memória: 32GB DDR5 4800 MHz;

Disco: SSD 1TB M.2 PCIe NVMe;

Placa de Vídeo: RTX 2000 ADA - 8 GB DDR6;

Tela: mínimo de 15,6" com resolução mínima de 1920 x 1080;

WebCam resolução mínima de 2MP;


Acessórios como trava de segurança, mouse USB conforme solicitado em edital;

Sistema Operacional: Windows 11 Pro;

Software de Segurança ABSOLUTE versão Resilience

Garantia de 36 meses para o equipamento e a bateria;

OVERVIEW

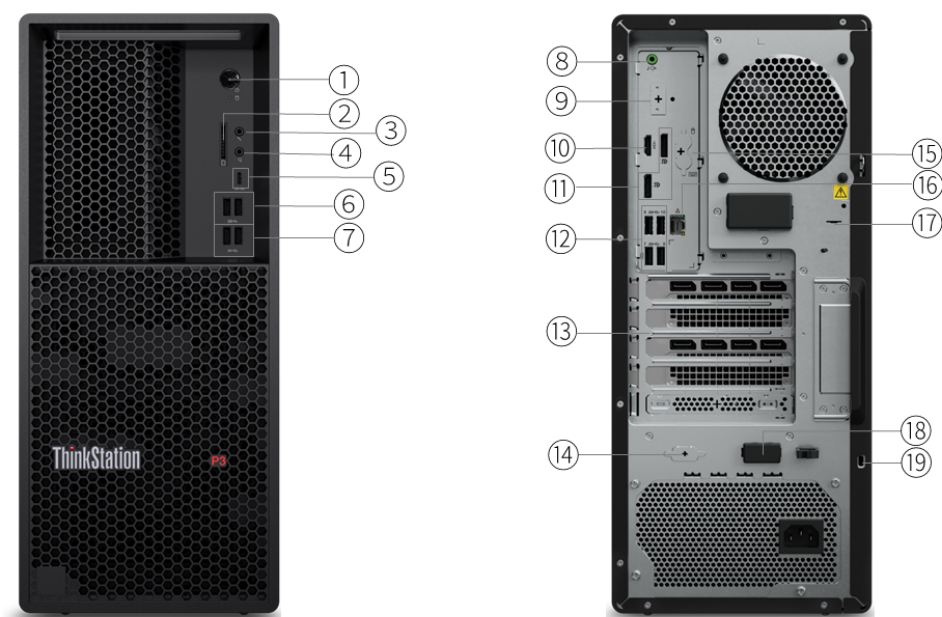

1. Power button	11. 2x DisplayPort
2. SD card reader *	12. 4x USB-A (USB 5Gbps)
3. Microphone (3.5mm)	13. Optional ports on expansion cards *
4. Headphone / microphone combo jack (3.5mm)	14. Serial (9-pin) *
5. USB-C (USB 10Gbps), data transfer only	15. 2x PS/2 ports (keyboard / mouse) *
6. 2x USB-A (USB 5Gbps)	16. Ethernet (GbE RJ-45)
7. 2x USB-A (USB 10Gbps)	17. E-lock slot
8. Audio line-out (3.5mm)	18. Cable lock slot
9. Flex IO *	19. Kensington Security Slot
10. HDMI	

- Notes:
- Items with * are only available on selected models
 - Flex IO supports one optional port from HDMI, VGA, USB-C (with DP function), and DP.

PERFORMANCE

Processor

Processor Family

Up to one 125W Intel® Core™ i3 / i5 / i7 / i9 (13th Gen or 14th Gen) processor; supports up to 24 cores; up to 6GHz.

Processor**[1]

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core™ i3-13100	4 (4 P-core + 0 E-core)	8	P-core 3.4GHz	P-core 4.5GHz	12MB	DDR5-4800	Intel® UHD Graphics 730
Core™ i5-13400	10 (6 P-core + 4 E-core)	16	P-core 2.5GHz / E-core 1.8GHz	P-core 4.6GHz / E-core 3.3GHz	20MB	DDR5-4800	Intel® UHD Graphics 730
Core™ i5-13500	14 (6 P-core + 8 E-core)	20	P-core 2.5GHz / E-core 1.8GHz	P-core 4.8GHz / E-core 3.5GHz	24MB	DDR5-4800	Intel® UHD Graphics 770
Core™ i5-13600	14 (6 P-core + 8 E-core)	20	P-core 2.7GHz / E-core 2.0GHz	P-core 5.0GHz / E-core 3.7GHz	24MB	DDR5-4800	Intel® UHD Graphics 770
Core™ i5-13600K	14 (6 P-core + 8 E-core)	20	P-core 3.5GHz / E-core 2.6GHz	P-core 5.1GHz / E-core 3.9GHz	24MB	DDR5-5600	Intel® UHD Graphics 770
Core™ i7-13700	16 (8 P-core + 8 E-core)	24	P-core 2.1GHz / E-core 1.5GHz	Max Turbo up to 5.2GHz / P-core 5.1GHz / E-core 4.1GHz	30MB	DDR5-5600	Intel® UHD Graphics 770
Core™ i7-13700K	16 (8 P-core + 8 E-core)	24	P-core 3.4GHz / E-core 2.5GHz	Max Turbo up to 5.4GHz / P-core 5.3GHz / E-core 4.2GHz	30MB	DDR5-5600	Intel® UHD Graphics 770
Core™ i9-13900	24 (8 P-core + 16 E-core)	32	P-core 2.0GHz / E-core 1.5GHz	Max Turbo up to 5.6GHz / P-core 5.2GHz / E-core 4.2GHz	36MB	DDR5-5600	Intel® UHD Graphics 770
Core™ i9-13900K	24 (8 P-core + 16 E-core)	32	P-core 3.0GHz / E-core 2.2GHz	Max Turbo up to 5.8GHz / P-core 5.4GHz / E-core 4.3GHz	36MB	DDR5-5600	Intel® UHD Graphics 770
Core™ i3-14100	4 (4 P-core + 0 E-core)	8	P-core 3.5GHz	P-core 4.7GHz	12MB	DDR5-4800	Intel® UHD Graphics 730
Core™ i5-14400	10 (6 P-core + 4 E-core)	16	P-core 2.5GHz / E-core 1.8GHz	P-core 4.7GHz / E-core 3.5GHz	20MB	DDR5-4800	Intel® UHD Graphics 730
Core™ i5-14500	14 (6 P-core + 8 E-core)	20	P-core 2.6GHz / E-core 1.9GHz	P-core 5.0GHz / E-core 3.7GHz	24MB	DDR5-4800	Intel® UHD Graphics 770
Core™ i5-14600	14 (6 P-core + 8 E-core)	20	P-core 2.7GHz / E-core 2.0GHz	P-core 5.2GHz / E-core 3.9GHz	24MB	DDR5-5600	Intel® UHD Graphics 770
Core™ i5-14600K	14 (6 P-core + 8 E-core)	20	P-core 3.5GHz / E-core 2.6GHz	P-core 5.3GHz / E-core 4.0GHz	24MB	DDR5-5600	Intel® UHD Graphics 770
Core™ i7-14700	20 (8 P-core + 12 E-core)	28	P-core 2.1GHz / E-core 1.5GHz	Max Turbo up to 5.4GHz / P-core 5.3GHz / E-core 4.2GHz	33MB	DDR5-5600	Intel® UHD Graphics 770
Core™ i7-14700K	20 (8 P-core + 12 E-core)	28	P-core 3.4GHz / E-core 2.5GHz	Max Turbo up to 5.6GHz / P-core 5.5GHz / E-core 4.3GHz	33MB	DDR5-5600	Intel® UHD Graphics 770
Core™ i9-14900	24 (8 P-core + 16 E-core)	32	P-core 2.0GHz / E-core 1.5GHz	Max Turbo up to 5.8GHz / P-core 5.4GHz / E-core 4.3GHz	36MB	DDR5-5600	Intel® UHD Graphics 770
Core™ i9-14900K	24 (8 P-core + 16 E-core)	32	P-core 3.2GHz / E-core 2.4GHz	Max Turbo up to 6.0GHz / P-core 5.6GHz / E-core 4.4GHz	36MB	DDR5-5600	Intel® UHD Graphics 770

Processor Sockets

1x FCLGA1700

Notes:

[1] Intel® Max Turbo frequency will vary depending on application workload and the hardware and software configurations, see <http://www.intel.com/technology/turboboost/> for more information.

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 DG Windows® 10 Pro 64
- Ubuntu Linux LTS
- Red Hat Enterprise Linux 9.2 (certified only, for detailed and latest information, please visit [Red Hat Certified Hardware](#))
- No preload operating system

Graphics

Integrated Graphics**

- Intel® UHD Graphics 730
- Intel® UHD Graphics 770

Discrete Graphics Support[1]

Supports up to one NVIDIA® RTX 5000 Ada Generation or two NVIDIA® RTX A2000

Discrete Graphics Offering

Graphics	Memory	Power	Connector	Form Factor	SLI / NVLink
NVIDIA® T400 4GB	4GB GDDR6	40W	3x miniDP 1.4	Single slot	None
NVIDIA® T1000 8GB	8GB GDDR6	50W	4x miniDP 1.4	Single slot	None
NVIDIA® RTX A2000 12GB	12GB GDDR6	70W	4x miniDP 1.4a	Dual slot	None
NVIDIA® RTX A4000	16GB GDDR6 with ECC	140W	4x DP 1.4a	Single slot	None
NVIDIA® RTX A4500	20GB GDDR6 with ECC	200W	4x DP 1.4	Dual slot	None
NVIDIA® RTX A5000	24GB GDDR6 with ECC	230W	4x DP 1.4a	Dual slot	None
NVIDIA® RTX A5500	24GB GDDR6 with ECC	230W	4x DP 1.4a	Dual slot	None
NVIDIA® RTX 2000 Ada Generation	16GB GDDR6	70W	4x miniDP 1.4a	Single slot	None
NVIDIA® RTX 4000 Ada Generation	20GB GDDR6 with ECC	130W	4x DP 1.4a	Single slot	-
NVIDIA® RTX 4500 Ada Generation	24GB GDDR6 with ECC	210W	4x DP 1.4a	Dual slot	-
NVIDIA® RTX 5000 Ada Generation	32GB GDDR6 with ECC	250W	4x DP 1.4a	Dual slot	-

Notes:

[1] Discrete graphics support may vary by configurations such as processor selection or power supply wattage.

Monitor Support

Monitor Support

Supports multiple displays via onboard video ports and discrete graphics, the number of maximum monitors supported depends on the graphic card in use

Chipset

Chipset

Intel® W680 chipset

Memory

Max Memory[1]

Up to 128GB (4x 32GB DDR5 UDIMM)

Memory Type**[2]

- DDR5-4400 UDIMM ECC

- DDR5-4400 UDIMM non-ECC

Memory Slots

4 DDR5 DIMM slots, 2 channels capable

Memory Protection

ECC on models with ECC DIMMs and ECC capable processor

Notes:

- [1] The max memory is based on the test results with current Lenovo® memory offerings.
- [2] DR5-4400 is maximum operating speed, memory operating speed varies depending on memory configuration:
1x 8GB / 2x 8GB / 1x 16GB / 2x 16GB / 2x 32GB configurations run as DDR5-4400;
4x 8GB / 4x 16GB configurations run as DDR5-4000;
4x 32GB configuration runs at DDR5-3600.

Storage

Storage Support^{[1][2]}

Up to five drives (4x HDD + 1x M.2 SSD) or six drives (3x HDD + 3x M.2 SSD)

- 3.5" HDD up to 6TB each
- 2.5" HDD up to 1TB each
- M.2 SSD up to 4TB or 2TB each (see Storage Type)

Storage Type^[3]

Disk Type	Interface	RPM	Offering	Security
2.5" SATA HDD	SATA 6Gb/s	7.2K	1TB / 1TB FIPS	-
3.5" SATA HDD	SATA 6Gb/s	7.2K	1TB / 2TB / 4TB / 6TB	-
M.2 2280 SSD for single M.2 to PCIe® adapter	PCIe® NVMe®, PCIe® 4.0 x4	-	256GB	Opal 2.0
M.2 2280 SSD for Onboard	PCIe® NVMe®, PCIe® 4.0 x4 Performance	-	512GB / 1TB / 2TB / 4TB	Opal 2.0
M.2 2280 SSD for single M.2 to PCIe® adapter	PCIe® NVMe®, PCIe® 4.0 x4 Performance	-	512GB / 1TB / 2TB	Opal 2.0

Storage Controllers

Storage Controller	Type	Interface	RAID	Cache
Integrated NVMe® controller	Standard	PCIe® NVMe®	0/1	None
Integrated SATA controller	Standard	SATA 6.0Gb/s	0/1/10/5	None

Notes:

- [1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.
- [2] For detailed storage bays infomation and how to upgrade optional drives for ThinkStation® products, please visit [ThinkStation® Storage Upgrade Guide](#)
- [3] M.2 slot on single M.2 to PCIe® adapter works at PCIe® 3.0.

Removable Storage

Optical Support

Optional one 9.0mm optical drive, DVD-ROM, DVD±RW, and Blu-ray

Card Reader

- SD card reader
- No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC897Q-CG codec

Speakers

Single speaker, 2W x1

Power Supply

Power Supply**

Power	Type	Efficiency	Key Features
500W	Fixed	92%	Autosensing, 80 PLUS Platinum qualified
750W	Fixed	92%	Autosensing, 80 PLUS Platinum qualified
1100W	Fixed	92%	Autosensing, 80 PLUS Platinum qualified

DESIGN

Mechanical

Form Factor

Tower (27L)

Dimensions (WxDxH)^[1]

180 x 370 x 415 mm (7.09 x 14.57 x 16.34 inches)

Weight^[2]

13.61 kg (30.0. lbs, maximum configuration)

Bays^[3]

Up to four disk bays:

- Bay 1 supports one 3.5" / 2.5" drive, standard
- Bay 2 supports one 3.5" / 2.5" drive, optional
- Bay 3 supports one 3.5" / 2.5" drive, optional
- Bay 4 supports one 3.5" / 2.5" drive, optional
- Front Access HDD Bay supports one 3.5" / 2.5" drive, optional, occupies Bay 3 location

M.2 Slots

- Up to 3x M.2 SSD:
 - 2 via onboard slot, can't be available when 4th HDD is selected
 - 1 via Single M.2 to PCIe® adapter
- One M.2 slot (for WLAN)

Expansion Slots

Supports four PCIe® slots with two PCIe® 4.0 x16 and two PCIe® 3.0 x1.

- Slot 1: PCIe® 4.0 x16, full height, full length, 75W, double-width
- Slot 2: PCIe® 3.0 x1, full height, half length, 25W
- Slot 3: PCIe® 4.0 x16 (x4 lanes), full height, half length, 25W
- Slot 4: PCIe® 3.0 x1, full height, half length, 25W

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

[3] Front access HDD bay can be selected when disk bays is equal or less that 2.

CONNECTIVITY

Network

Onboard Ethernet

Gigabit Ethernet, Intel® Ethernet Connection I219-LM, 1x RJ-45, supports Wake-on-LAN

Optional Ethernet

Up to two additional PCIe® x1 Ethernet adapters or one PCIe® x4 or x8 Ethernet adapter support; up to two additional 25GbE ports

- Gigabit Ethernet, Intel® I210-T1, 1x RJ-45, PCIe® x1
- Gigabit Ethernet, Intel® I350-T2, 2x RJ-45, PCIe® x4
- Gigabit Ethernet, Broadcom BCM5719, 4x RJ-45, PCIe® x4
- Gigabit Ethernet, Broadcom BCM5720, 2x RJ-45, PCIe® x1
- Gigabit Ethernet, Realtek® RTL8168H, 1x RJ-45, PCIe® x1
- 2.5 Gigabit Ethernet, Realtek® RTL8125BGS, 1x RJ-45, PCIe® x1

- 10 Gigabit Ethernet, Marvell AQtion AQN-107, 1x RJ-45, PCIe® x4
- 25 Gigabit Ethernet, NVIDIA® Mellanox ConnectX-6, 2x SFP28, PCIe® x8

WLAN + Bluetooth®

- Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1 (Bluetooth® 5.3 hardware ready), Intel® vPro® technology support^[1]
- No WLAN and Bluetooth®

Notes:

^[1] Bluetooth® 5.3 is hardware ready but may run at a lower version due to OS limitations. Wi-Fi® 6E is only enabled on Windows® 11 and operates as Wi-Fi® 6 with Windows® 10.

Ports^[1]**Front Ports**

- 1x USB-C® (USB 10Gbps / USB 3.2 Gen 2), data transfer only
- 2x USB-A (USB 5Gbps / USB 3.2 Gen 1)
- 2x USB-A (USB 10Gbps / USB 3.2 Gen 2)
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

Rear Ports^[2]

- 4x USB-A (USB 5Gbps / USB 3.2 Gen 1), one supports Smart Power On
- 1x HDMI® 2.1 TMDS
- 2x DisplayPort™ 1.4
- 1x Ethernet (RJ-45)
- 1x line-out (3.5mm)

Optional Rear Ports^[3]

- 1x USB-C® (USB 5Gbps / USB 3.2 Gen 1), with DisplayPort™ function (Flex IO)
- 1x HDMI® 2.1 TMDS (Flex IO)
- 1x DP 1.2 (Flex IO)
- 1x VGA (Flex IO)
- 1x parallel (via cable and PCIe® bracket)
- 1x Thunderbolt™ 4 (via additional PCIe® adapter)
- 1x USB-C® (USB 20Gbps / USB 3.2 Gen 2x2), support data transfer, via USB-C® PCIe® x4 card
- 2x USB-A (Hi-Speed USB / USB 2.0), via cable and PCIe® bracket
- 2x USB-A (USB 5Gbps / USB 3.2 Gen 1), via additional PCIe® adapter
- 1x serial (via cable)
- 4x serial (via 4-port serial expansion card, PCIe® x1)
- 2x PS/2 (via cable)

Notes:

^[1] The transfer speed of the ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes, and other factors related to system configuration and your operating environment, will be slower than the theoretical speed.

^[2] For video ports on discrete graphics, please see graphics section.

^[3] 2x USB 2.0 and 1x parallel can not be chosen simultaneously.

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

Physical Locks

- (Optional) Cable lock
- (Optional) E-lock
- Kensington® Security Slot™, 3 x 7 mm
- Padlock Loop

Chassis Intrusion Switch

- Chassis intrusion switch
- No chassis intrusion switch

BIOS Security

- Administrator password
- Power-on password
- Self-healing BIOS
- UEFI Secure Boot

MANAGEABILITY**System Management****System Management^[1]**

- Intel® vPro® Enterprise with Intel® AMT 16
- Non-vPro®

Notes:

[1] Intel® vPro® offers a superset of DASH's defined capabilities.

SERVICE**Warranty^[1]****Base Warranty^{**}**

- 1-year limited onsite service
- 2-year limited onsite service
- 3-year limited onsite service
- No base warranty

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

OPERATING REQUIREMENTS**Operating Environment****Temperature**

- Operating: 10°C (50°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

Relative Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

CERTIFICATIONS**Green Certifications^[1]****Green Certifications**

- (Optional) ENERGY STAR® 8.0
- (Optional) EPEAT™ Gold Registered^[2]
- ErP Lot 3
- RoHS compliant
- TCO Certified 9.0

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-

declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.
[2] EPEAT™ is registered where applicable, please visit epeat.net for registration status by country.

ISV Certifications

ISV Certifications

Please visit [ISV certifications for Lenovo® Workstations](#)

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



OVERVIEW



1. Power connector	6. USB 3.2 Gen 1
2. DP 1.2	7. USB 3.2 Gen 1
3. HDMI 1.4	8. Audio line-out (3.5mm)
4. VGA	9. USB 3.2 Gen 1
5. USB-B 3.2 Gen 1	10. USB 3.2 Gen 1

PERFORMANCE

Panel

Panel

3-side NearEdgeless, In-Plane Switching

Backlight

WLED

Display Size

21.5 inches

Max View Area

WxH: 476.1 x 267.8 mm

Resolution

1920 x 1080

Aspect Ratio

16:9

Pixel Pitch

0.248 x 0.248 mm

Dot / Pixel Per Inch

102 dpi

Brightness

250 cd/m²

Contrast Ratio

- Dynamic Contrast Ratio: 3000000:1
- Contrast Ratio: 1000:1

View Angle (H / V)

Horizontal: 178°, Vertical: 178°

Response Time

- Extreme Mode: 4 ms
- Normal Mode: 6 ms
- Off Mode: 14 ms

Refresh Rate

60Hz

Color Gamut

- Coverage Ratio: 99% sRGB
- Color Area Ratio: 108% sRGB

Color Support

16.7 Million

Color Depth

8-bit (6-bit+FRC)

Screen Surface Treatment

Anti-glare

Operating System

Operating System

- Windows® 11 Support
- Windows® 10 Support

Power Supply

Power Consumption

- Typical / Max: 15W / 48W
- Sleep / Off mode: <0.5W
- Switch-off Mode: <0.3W
- Energy Star Power On: 11W

- Energy Star TEC: 34.41kWh
- Internal Power Supply

Voltage Required

AC 100 to 240 V (50-60Hz)

Special Features

Special Features

- Lenovo® ThinkColour (Lenovo® Accessories and Display Manager) Support
Lenovo® ThinkColour supports Windows® 10 & 11, Mac OS, and Windows® On Arm (functions vary across systems).
Lenovo® Accessories and Display Manager is formerly Lenovo® Display Control Center.
- Natural Low Blue Light

DESIGN

Mechanical

ThinkCentre® M Series Support

ThinkCentre® M Series Tiny Support

For supporting Tiny devices, additional Tiny Clamp Bracket Mounting Kit III (PN: 4XF1K72399) are needed (sold separately).

Bezel Width

- Side: 2mm
- Top / Bottom: 2mm / 17.3mm

Cable Management

Support

Case Color

Raven black

Dimensions (WxDxH)^[1]

Models	Dimensions
Lowest Position	498.3 x 194.7 x 332.4 mm (19.62 x 7.67 x 13.09 inches)
Highest Position	498.3 x 194.7 x 487.4 mm (19.62 x 7.67 x 19.19 inches)
Head Only	489.3 x 46.4 x 294.7 mm (19.26 x 1.83 x 11.60 inches)

Packaging Dimensions (WxDxH)

563 x 144 x 414 mm (22.17 x 5.67 x 16.30 inches)

Weight^[2]

Models	Weight
Monitor With Stand	4.9 kg (10.8 lbs)
Monitor Head Only	3.0 kg (6.61 lbs)

Packaging Weight

6.8 kg (14.99 lbs)

Mounting

Supports VESA mount 100mm

Stand

Supports -5° to +23.5° tilt, left & right 45 swivel, 90° pivot, up to 155mm lift

In the Box

- Monitor with Stand
- 1x HDMI® cable (1.8m)
- 1x USB-A to USB-B Cable (1.8m)
- 1x Power cable (1.8m)
- Quick Setup Guide
- Warranty Booklet

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Ports^[1]

Rear Ports

- 1x USB-B 3.2 Gen 1, USB upstream
- 4x USB 3.2 Gen 1, USB downstream
- 1x HDMI® 1.4
- 1x DisplayPort™ 1.2
- 1x VGA
- 1x Power Connector
- 1x audio-out (3.5mm)

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

SECURITY & PRIVACY

Security

Physical Locks

Kensington® Security Slot™

SERVICE

Warranty

Base Warranty

3-year limited warranty

CERTIFICATIONS

Green Certifications^[1]

Green Certifications

- ENERGY STAR® Certified
- EPEAT™ Gold Registered^[2]
- RoHS compliant
- TCO Certified 9.0
- TCO edge 2.0
- Volatile Organic Compound Certification

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.


[2] EPEAT™ is registered where applicable, please visit epeat.net for registration status by country.

Other Certifications

Other Certifications

- Eyesafe® Certified 2.0
- TÜV Rheinland® Eye Comfort Certification
- TÜV Rheinland® Flicker Free
- TÜV Rheinland® Low Blue Light
- TÜV Rheinland® Low Blue Light (Hardware Solution)

- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



OVERVIEW



1. Nano-SIM card slot *	7. SD Express 7.0 card reader
2. Headphone / microphone combo jack (3.5mm)	8. Smart card reader *
3. Thunderbolt 4	9. Ethernet (GbE RJ-45)
4. USB-A (USB 5Gbps), Always On	10. Thunderbolt 4
5. Kensington Nano Security Slot	11. Power connector
6. HDMI	

- Notes:
- Items with * are only available on selected models

PERFORMANCE

Processor

Processor Family

Intel® H Series Core™ Ultra 7 / 9 Processor; supports up to 16 cores; up to 5.1GHz; TDP ratings of up to 45W

Processor**^[1]

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics	AI Engine
Core™ Ultra 7 155H	16 (6 P-core + 8 E-core + 2 LPE-core)	22	P-core 1.4GHz / E-core 900MHz / LPE-core 700MHz	P-core 4.8GHz / E-core 3.8GHz / LPE-core 2.5GHz	24MB	Intel® Arc™ Graphics	Intel® AI Boost
Core™ Ultra 7 165H	16 (6 P-core + 8 E-core + 2 LPE-core)	22	P-core 1.4GHz / E-core 900MHz / LPE-core 700MHz	P-core 5.0GHz / E-core 3.8GHz / LPE-core 2.5GHz	24MB	Intel® Arc™ Graphics	Intel® AI Boost
Core™ Ultra 9 185H	16 (6 P-core + 8 E-core + 2 LPE-core)	22	P-core 2.3GHz / E-core 1.8GHz / LPE-core 1GHz	P-core 5.1GHz / E-core 3.8GHz / LPE-core 2.5GHz	24MB	Intel® Arc™ Graphics	Intel® AI Boost

Notes:

^[1] Intel® Arc™ graphics only available on select H-series Intel® Core™ Ultra processor powered systems with at least 16GB of system memory in a dual-channel configurations, otherwise it will function as Intel® Graphics.

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 DG Windows® 10 Pro 64
- Ubuntu Linux LTS
- Red Hat Enterprise Linux 9.2 (certified only, for detailed and latest information, please visit [Red Hat Certified Hardware](#))^[1]
- No preload operating system

Notes:

^[1] Red Hat Enterprise Linux 9.2 certification will be available after June 28th, 2024.

NPU

NPU

Intel® AI Boost integrated in Intel® Core™ Ultra processor

Graphics

Graphics

Graphics	Type	Memory	TGP	Key Features
Intel® Arc™ Graphics ^[1]	Integrated	Shared	Share CPU TDP	DirectX® 12.1
Intel® Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12.1
NVIDIA® RTX 500 Ada Generation Laptop GPU	Discrete	4GB GDDR6	35W	DirectX® 12 Ultimate, Vulkan Support, NVIDIA® FXAA / TXAA Anti-Aliasing, NVIDIA® RTX Desktop Manager
NVIDIA® RTX 1000 Ada Generation Laptop GPU	Discrete	6GB GDDR6	35W	DirectX® 12 Ultimate, Vulkan Support, NVIDIA® FXAA / TXAA Anti-Aliasing, NVIDIA® RTX Desktop Manager
NVIDIA® RTX 2000 Ada Generation Laptop GPU	Discrete	8GB GDDR6	35W	DirectX® 12 Ultimate, Vulkan Support, NVIDIA® FXAA / TXAA Anti-Aliasing, NVIDIA® RTX Desktop Manager
NVIDIA® RTX 3000 Ada Generation Laptop GPU	Discrete	8GB GDDR6	35W	DirectX® 12 Ultimate, Vulkan Support, NVIDIA® FXAA / TXAA Anti-Aliasing, NVIDIA® RTX Desktop Manager

Notes:

[1] Intel® Arc™ Graphics only available on select H-series Intel® Core™ Ultra processor powered systems with at least 16GB of system memory in a dual-channel configurations, otherwise it will function as Intel® Graphics.

Monitor Support

Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via Thunderbolt™ 4 and HDMI®).
Max resolution for multiple external display:

- 3x 3840x2160@60Hz (Thunderbolt™ 4 and HDMI®)

Max resolution for single external display:

- Thunderbolt™ 4 supports up to 7680x4320@60Hz
- HDMI® supports up to 7680x4320@60Hz

Chipset

Chipset

Intel® SoC (System on Chip) platform

Memory

Max Memory

Up to 96GB (2x 48GB DDR5 SO-DIMM)

Memory Slots

Two DDR5 SO-DIMM slots, dual-channel capable

Memory Type

DDR5-5600 non-ECC

Storage

Storage Support^[1]

Up to two drives, 2x M.2 SSD

- M.2 2280 SSD up to 4TB, 2TB each

Storage Slot

Two M.2 2280 PCIe® 4.0 x4 slots

Storage Type^{**}

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	512GB / 1TB	Opal 2.0
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4 Performance	512GB / 1TB / 2TB	Opal 2.0

RAID

RAID 0/1 support

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

Removable Storage

Card Reader

SD Express 7.0 card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby Audio™ Premium

Microphone

- Dual-microphone array, far-field, Dolby Voice®
- No microphone

Camera**

- 5.0MP + IR with privacy shutter and Ultrasonic Human Presence Detection, fixed focus
- FHD 1080p with privacy shutter, fixed focus
- No camera

Battery

Battery

Integrated Li-Polymer 90Wh battery, supports Rapid Charge (charge up to 80% in 1hr)

Power Adapter

Power Adapter**[1]

- 135W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz
- 170W slim tip (3-pin) AC adapter, 100-240V, 50-60Hz

Notes:

[1] AC adapter offerings depend on the country.

DESIGN

Display

Display**

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Refresh Rate	Viewing Angle (L/R/U/D)	Key Features
16"	WUXGA (1920x1200)	None	IPS	300nits	Anti-glare	16:10	800:1	45% NTSC	60Hz	85°/85°/85°/85°	83.9% screen to body ratio, DC dimming
16"	WUXGA (1920x1200)	On-cell touch	IPS	300nits	Anti-glare	16:10	1000:1	45% NTSC	60Hz	85°/85°/85°/85°	83.9% screen to body ratio, Eyesafe® Certified 2.0, TÜV Low Blue Light, DC dimming
16"	WUXGA (1920x1200)	None	IPS	400nits	Anti-glare	16:10	1200:1	100% sRGB	60Hz	89°/89°/89°/89°	83.9% screen to body ratio, TÜV Low Blue Light, DC dimming
16"	WQUXGA (3840x2400)	None	IPS	800nits	Anti-glare	16:10	1500:1	100% DCI-P3	60Hz	85°/85°/85°/85°	83.9% screen to body ratio, DisplayHDR™ 400, Dolby Vision®, Eyesafe® Certified 2.0, TÜV Low Blue Light, X-Rite® Factory Color Calibration, DC dimming

Color Calibration

- X-Rite® factory color calibration (WQUXGA display)
- No color calibration

Touchscreen

- On-cell multi-touch, supports 10-point touch (selected FHD display)
- Non-touch

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls, numeric keypad

Keyboard Backlight

LED backlight

UltraNav™

3-button TrackPoint® pointing device and Mylar® surface multi-touch Trackpad, 67.6 x 115 mm (2.66 x 4.53 inches)

Mechanical

Dimensions (WxDxH)^[1]

365 x 262 x 24.66 mm (14.37 x 10.32 x 0.97 inches)

Weight^[2]

Starting at 2.22 kg (4.90 lbs)

Case Color

Black

Case Material

PC-ABS (top), PC-ABS (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

Ethernet**

- Gigabit Ethernet, Intel® Ethernet Connection I219-LM (vPro® models), 1x RJ-45, supports Wake-on-LAN
- Gigabit Ethernet, Intel® Ethernet Connection I219-V (non-vPro® models), 1x RJ-45, supports Wake-on-LAN

WLAN + Bluetooth®

Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3^[1]

WWAN**

- Wireless WAN upgradable to 4G or 5G (with antenna ready)
- Quectel EM160R-GL, 4G LTE CAT16, M.2 card, with embedded eSIM functionality
- Quectel RM520N-GL, 5G Sub-6 GHz, M.2 Card, with embedded eSIM functionality
- No support

SIM Card

No physical SIM card inbox

NFC

- Near Field Communication
- No support

Notes:

[1] Wi-Fi® 6E full features might be limited by country-level restrictions.

Wi-Fi® 6E is only enabled on Windows® 11 and operates as Wi-Fi® 6 with Windows® 10.

6GHz Wi-Fi® 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi® 6E, and the regional regulatory certifications & spectrum allocation.

Bluetooth® 5.3 operation requires Windows® 11. For more information please visit [General Bluetooth® Support Information on Microsoft®](#).

Ports^[1]

Standard Ports

- 1x USB-A (USB 5Gbps / USB 3.2 Gen 1), Always On

- 2x USB-C® (Thunderbolt™ 4 / USB4® 40Gbps), with USB PD 3.0 and DisplayPort™ 2.1^[2]
- 1x HDMI® 2.1, up to 8K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Ethernet (RJ-45)
- 1x SD Express 7.0 card reader
- 1x Security keyhole

Optional Ports

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

[2] Power Delivery only supports power-out for charging peripherals.

Docking**Docking**

Various docking solutions supported via Thunderbolt™ or USB-C®.

For more compatible docking solutions, please visit

[Docking for ThinkPad® P16v Gen 2](#)

SECURITY & PRIVACY**Security****Security Chip**

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

Smart Card Reader

Smart card reader

Fingerprint Reader

Touch style fingerprint reader integrated in power button, match-on-chip

BIOS Security

- NVMe® password
- Power-on password
- Self-healing BIOS
- Supervisor password

Other Security

- (Optional) IR camera for Windows® Hello (facial recognition)
- (Optional) Ultrasonic Human Presence Detection for IR camera
- Camera privacy shutter (camera models)

MANAGEABILITY**System Management****System Management**

- Intel® vPro® Enterprise
- Non-vPro®

SERVICE

Warranty

Base Warranty**

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service

ACCESSORIES

Bundled Accessories

Bundled Accessories

- Lenovo® HDMI® to VGA Monitor Adapter
- Lenovo® USB-C® to DisplayPort™ Adapter
- Lenovo® USB-C® to VGA Adapter

OPERATING REQUIREMENTS

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping packaging: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

^[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

ENVIRONMENTAL

Sustainability

Material^[1]

85% PCC recycled plastic used in key caps
90% PCC recycled plastic used in speaker enclosure
90% PCC recycled plastic used in the battery
30% PCC recycled plastic used in SIM tray
30% PCC recycled plastic used in 135W and 170W adapters
Plastic free packaging with 90% recycled and/or FSC certified content (retail / standard / bluk packaging)

Notes:

^[1] PCC: Post Consumer Content, recycled materials from customers.
FSC: Forest Stewardship Council.

CERTIFICATIONS

Green Certifications^[1]

Green Certifications^[2]

- ENERGY STAR® 8.0
- EPEAT™ Gold Registered^[3]
- RoHS compliant
- TCO Certified 9.0

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ registration and ENERGY STAR® certification are dependent on system OS. Please visit epeat.net and energystar.gov for more information.

[3] EPEAT™ is registered where applicable, please visit epeat.net for registration status by country.

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

Other Certifications

- (Optional) Eyesafe® Certified 2.0
- (Optional) TÜV Rheinland® Low Blue Light

ISV Certifications

ISV Certifications

Please visit [ISV certifications for Lenovo® Workstations](#)

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

